

2200 Series Commercial Aluminum Window

- Extruded aluminum frames and sashes
- 7/8" IG standard - special glass available
- Full thermal break of frame and sash
- Powder Coat finish
- 3-1/4" frame depth standard
- All units in Series rated C-50 or better
- Full perimeter nailing fin standard
- Sliders feature brass rollers for long life
- White and bronze standard
- Hung units feature tilt-in sashes
- Available single or double operating sashes
- All operating handles integral to sashes
- Operable models include half screens
- All units can be mullied for larger openings

GLASS OPTIONS



- Internal Grids
- Low-E
- Frosted
- Tinted

FRAME OPTIONS


- Nailing Fin
- No Nailing Fin
- Nailing Fin w/ Trim Package
- Mullion



2200 Series Commercial Aluminum Window

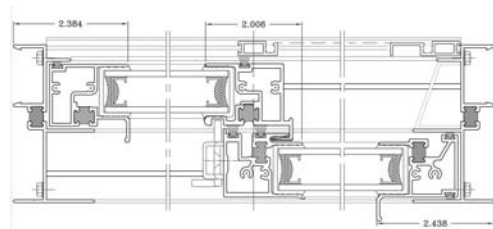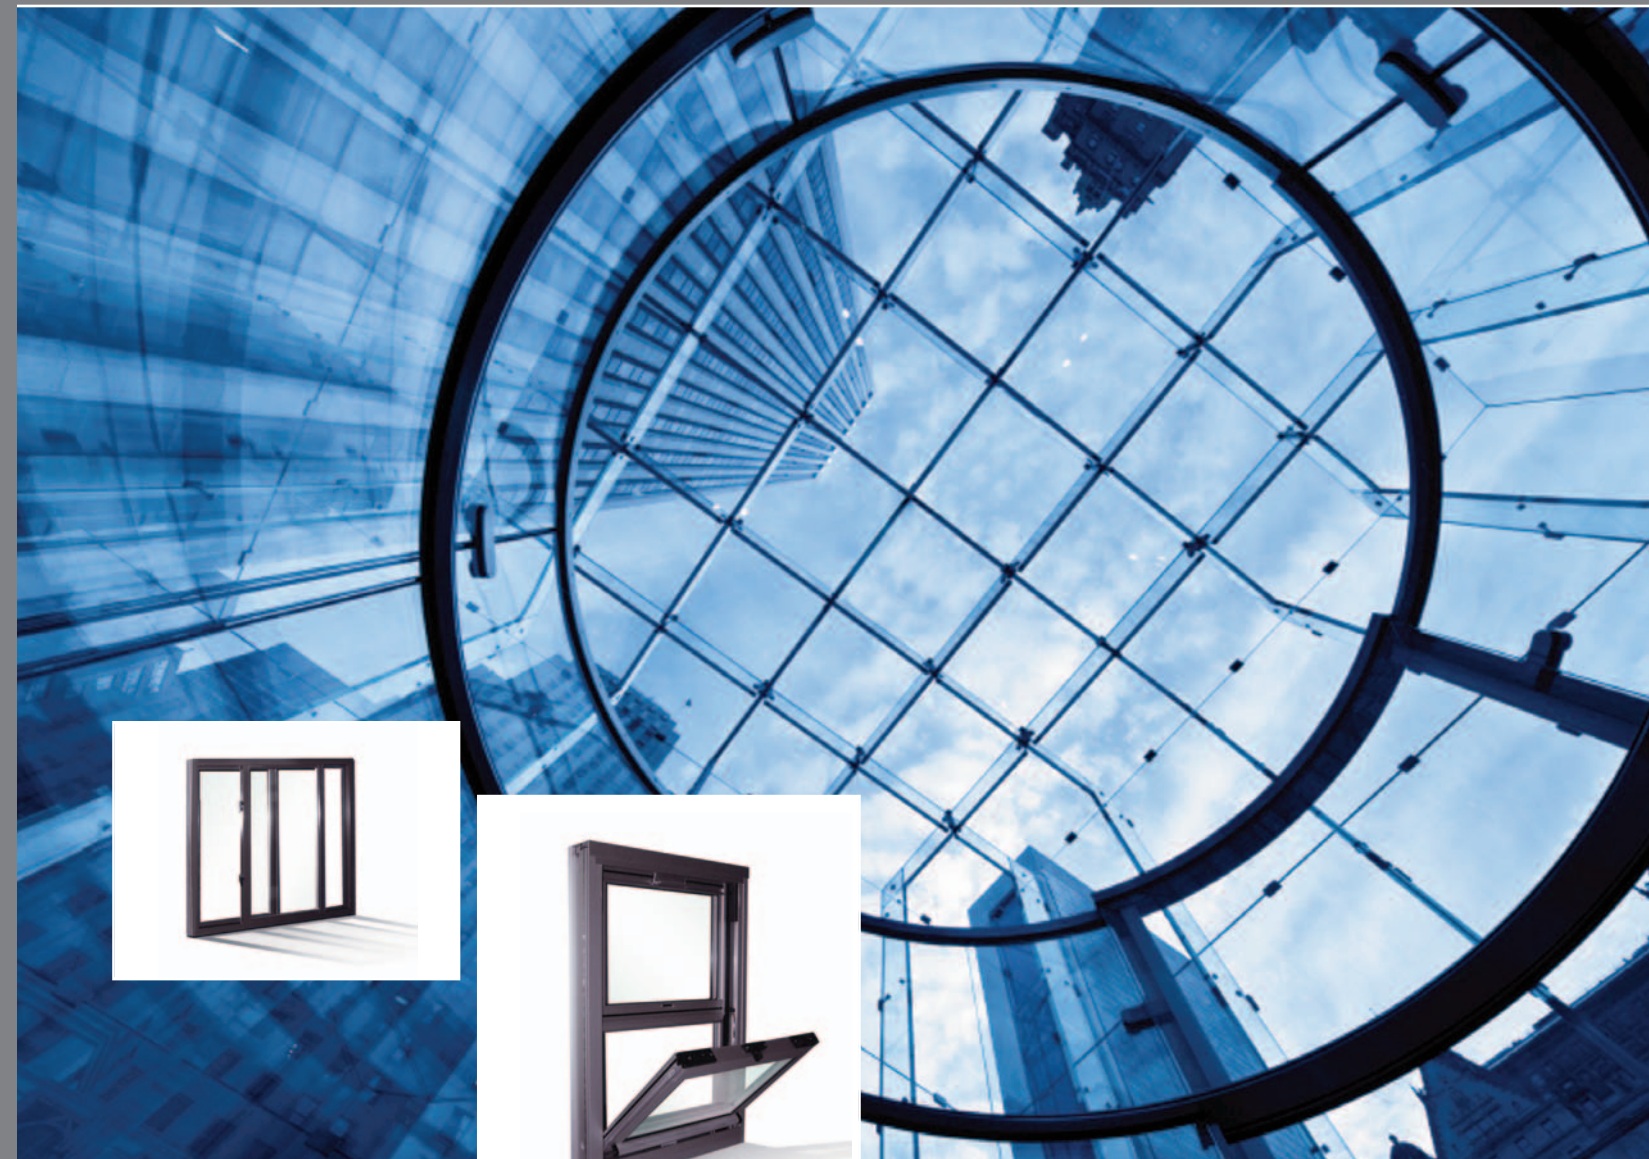

THERMAL BREAK ALUMINUM WINDOW SLIDER
2200 SERIES
TOP VIEW (1:1)

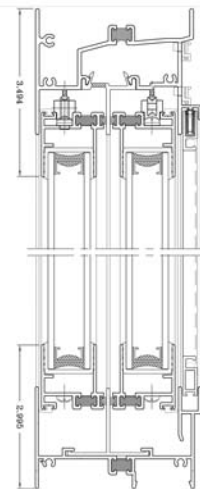

THERMAL BREAK ALUMINUM WINDOW SLIDER
2200 SERIES
SIDE VIEW (1:1)

APPLICATIONS: Commercial, Agricultural, Institutional, General Utility

aluminum windows

©2011 rev. 06.09.11.

2200 Series Commercial Aluminum Window

MANUFACTURING:

2200 Series aluminum windows are manufactured to CannonBall:HNP specifications in a state-of-the-art, award winning manufacturing facility. This is an ISO 9001 certified facility being operated by a Top 100 window manufacturing company with over 15 years experience producing residential, commercial, heavy commercial, and architectural windows.

WINDOW FAMILY:

The standard configuration of the 2200 Series Commercial Window features thermally broken extruded aluminum construction with coped and butt-joined corners fastened two screws per corner. Other standard features include clear 7/8" insulated glass, nailing fin and fiberglass half screen. Operable units can be configured with one or both sashes operating. Available in horizontal slider, 3-lite slider, hung, picture, circle top and architectural shapes. Optional trim package available to accommodate metal profiles up to 1-1/4" in rib height.


PACKAGING:

The standard packaging of 2200 Series windows is cornered and shrink wrapped. These units can also be ordered cartoned with or without the shrink wrap if required. Bulk packs of stock units are also available with individual packaging for each window, with the quantity of windows packaged in a Gaylord for easier shipping and inventory management. Alternative packaging does not effect lead times.

WINDOWS COMPARISON

2200 SERIES Thermally Broken Construction	COMPETITION Thermally Broken Construction
Integral Nailing fins	Integral Nailing Fins
Fiberglass Screens Included	Fiberglass Screens Included
✓ 7/8" IG - improved efficiency and reduced sound transmission	Inferior 5/8" or 3/4" IG
✓ C-50 rating or better on all configurations	LC-25 rating on limited configurations
✓ Optional trim package installed after siding is applied	Fixed J-Channel or no J-Channel only
✓ Windows shipped in protective packaging on skids - easy handling and less breakage	Windows shipped bulk with minimal packaging - must be manually unloaded and sorted
✓ Available as part of your regular CannonBall:HNP deliveries	Delivered separately - not all locations serviced

Design Features

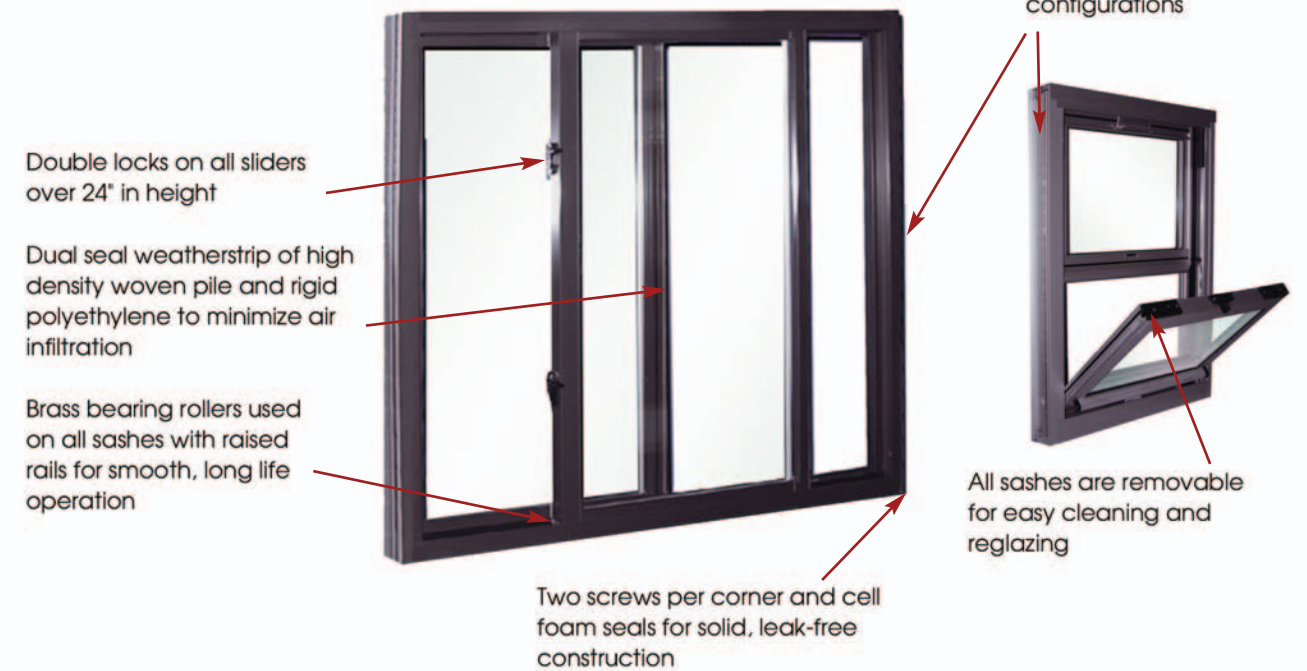


LEAD TIMES:

All non-stock 2200 Series windows require a 4-6 week lead time. As with other CannonBall:HNP products, specific sizes and configurations can be made available on a standard 2 week lead time depending on overall volume. For specialized stocking programs where the customer can demonstrate a history of purchasing specific configurations and sizes, it will typically take 4-6 weeks to set up the original program and provide the initial order, after which the special stock units will be available on a standard 2 week lead time.

WARRANTY:

CannonBall:HNP warrants to the original purchaser that each 2200 Series window will be free from defects in material and workmanship for a period of one year following proper installation. The warranty shall not apply to any product which has been subjected to abuse, misuse or accidents. This warranty shall be null and void if the product is not installed and maintained pursuant to CannonBall:HNP'S installation specifications and instructions. Further, this warranty does not extend to normal wear and tear.

Available Configurations



HORIZONTAL SLIDERS 2200 SERIES
Width = 22" to 96" | Height = 11" to 64"




PICTURE WINDOWS - 2210 SERIES
Width = 10" to 62" | Height = 10" to 80"



SINGLE / DOUBLE HUNGs - 2220 SERIES:
Width = 14" to 44" | Height = 24" to 72"



THREE-LITE SLIDERS - 2230 SERIES:
Width = 45" to 106" | Height = 11" to 64"



CIRCLE TOP WINDOWS - 2240 SERIES:
Width = 24" to 80"